
# TECHNICAL DATA SHEET


INTERIOR FINISHES

## TCP SPC Flooring

SPC flooring with IXPE underlay.

EXAMPLE PRODUCTS FROM THE RANGE

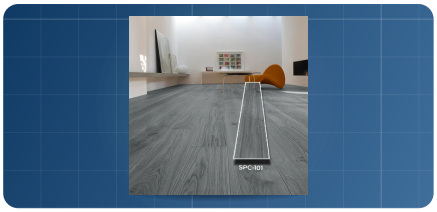

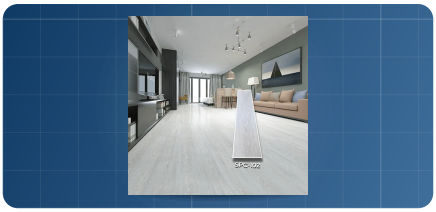



| | |
|---|---|
| Made from | Stone-plastic composite (SPC) |
| Underlay material | IXPE |

**182 x 1220**
Width x length (mm)

**4 mm**
SPC core

**1 mm**
IXPE underlay

**0.5 mm**
Wear layer

### 1 PRODUCT IDENTIFICATION

| ITEM | DESCRIPTION |
|---|---|
| Product | TCP SPC Flooring |
| Material | SPC flooring |
| Surface coating | Ceramic UV coating; deep embossed |

### 2 PRODUCT DIMENSIONS

| PARAMETER | VALUE | UNIT | SCOPE |
|---|---|---|---|
| Width | 182 | mm | Specified format |
| Length | 1220 | mm | Specified format |
| SPC core | 4 | mm | Specified format |
| Underlay | 1 | mm | IXPE |
| Wear layer | 0.5 | mm | Specified format |

Dimensions apply to the product described in this sheet. Other sizes are not covered by this specification.

### 3 COMPOSITION

| INGREDIENT | % |
|---|---|
| PVC | 25 |
| Calcium powder | 74 |
| Additive | 1 |


### 4 PRODUCT FEATURES

- Virgin SPC core, 4 mm, with 1 mm IXPE backing.
- 0.5 mm wear layer; ceramic UV surface coating.
- Click installation and deep-embossed finish.

### 5 TECHNICAL NOTES

Plank dimensions: 182 x 1220 mm, specified as 4 mm + 1 mm IXPE, with a 0.5 mm wear layer. The wear layer is stated separately; do not add it to derive an unconfirmed overall thickness. EVA-backed variants are not covered. Acoustic, slip and abrasion ratings are not specified here.

### 6 PRODUCT STRUCTURE

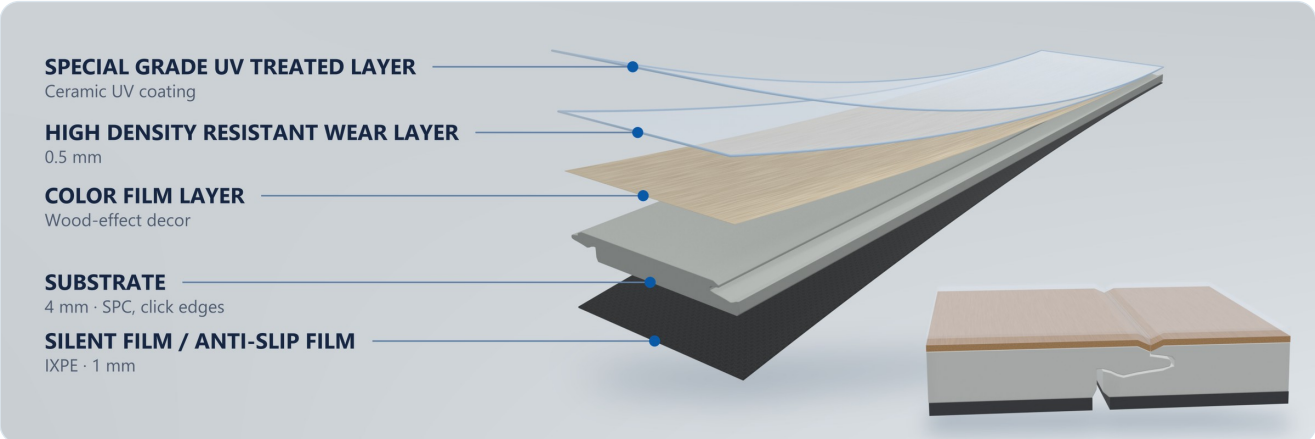


Opened-layer schematic with V-groove click joint; gaps, layer thicknesses and appearance illustrative.



Specifications apply to the product described in this sheet. Verify suitability for the intended application before use.



# FICHE TECHNIQUE

FINITIONS INTÉRIEURES

## TCP Sols SPC

Sols SPC avec sous-couche IXPE.

EXEMPLES DE PRODUITS DE LA GAMME

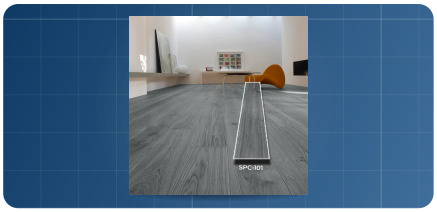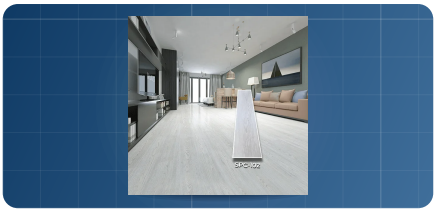
| | |
|---|---|
| Constitué de | Composite pierre-plastique (SPC) |
| Matériau de sous-couche | IXPE |

**182 x 1220**
Largeur x longueur (mm)

**4 mm**
Âme SPC

**1 mm**
Sous-couche IXPE

**0,5 mm**
Couche d'usure

### 1 IDENTIFICATION DU PRODUIT

| ÉLÉMENT | DESCRIPTION |
|---|---|
| Produit | TCP Sols SPC |
| Matériau | Revêtement de sol SPC |
| Revêtement | Revêtement UV céramique ; relief profond |

### 2 DIMENSIONS DU PRODUIT

| PARAMÈTRE | VALEUR | UNITÉ | PORTÉE |
|---|---|---|---|
| Largeur | 182 | mm | Format indiqué |
| Longueur | 1220 | mm | Format indiqué |
| Âme SPC | 4 | mm | Format indiqué |
| Sous-couche | 1 | mm | IXPE |
| Couche d'usure | 0,5 | mm | Format indiqué |

Les dimensions concernent le produit décrit dans cette fiche. Les autres formats ne sont pas couverts par cette spécification.

### 3 COMPOSITION

| CONSTITUANT | % |
|---|---|
| PVC | 25 |
| Poudre de calcium | 74 |
| Additif | 1 |

### 4 CARACTÉRISTIQUES DU PRODUIT

- Âme SPC vierge de 4 mm, avec sous-couche IXPE de 1 mm.
- Couche d'usure de 0,5 mm ; revêtement de surface UV céramique.
- Assemblage clipsable et finition à relief profond.

### 5 NOTES TECHNIQUES

Dimensions de la lame : 182 x 1220 mm, spécifiée 4 mm + 1 mm IXPE, avec une couche d'usure de 0,5 mm. La couche d'usure est indiquée séparément ; ne pas l'ajouter pour calculer une épaisseur totale non confirmée. Les variantes à sous-couche EVA ne sont pas couvertes. Les performances acoustiques, de glissement et d'abrasion ne sont pas précisées ici.

### 6 STRUCTURE DU PRODUIT

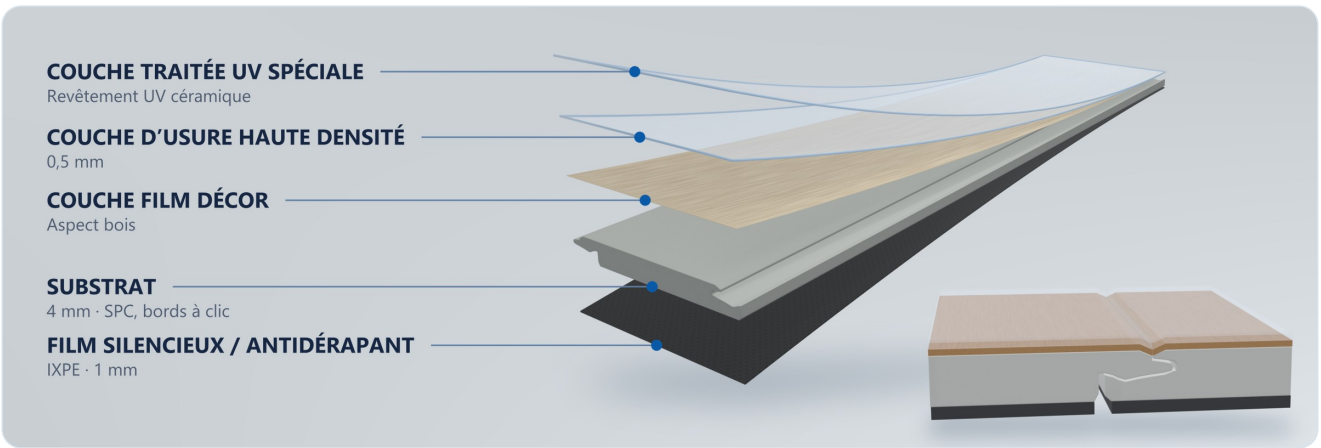



Schéma en couches ouvertes avec joint à clic en V ; espacements, épaisseurs des couches et aspect illustratifs.


Les spécifications concernent le produit décrit dans cette fiche. Vérifier son adéquation à l'usage prévu avant utilisation.